
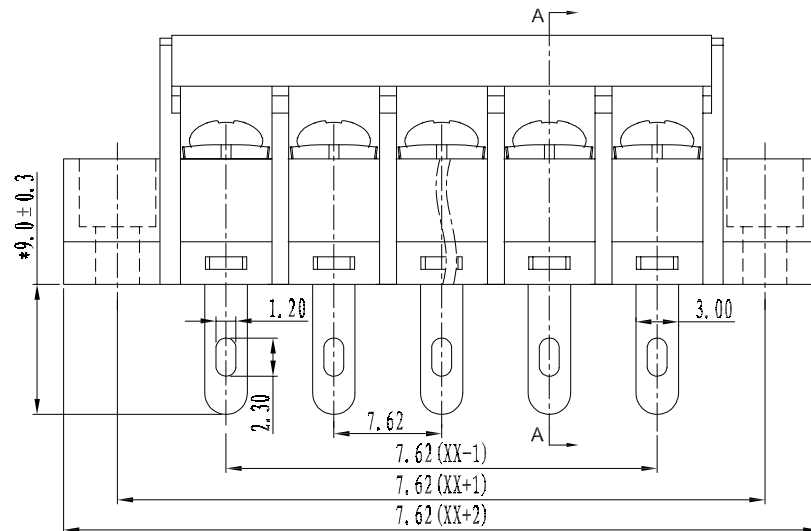
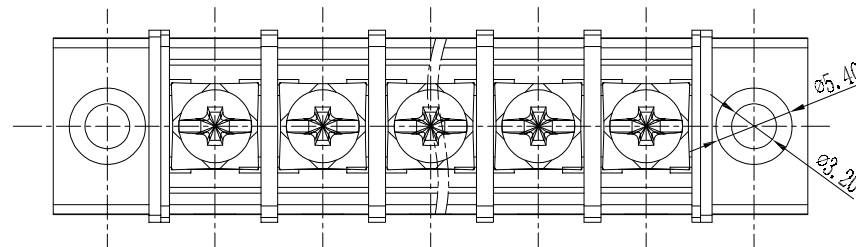
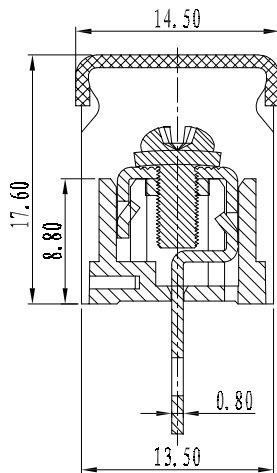


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

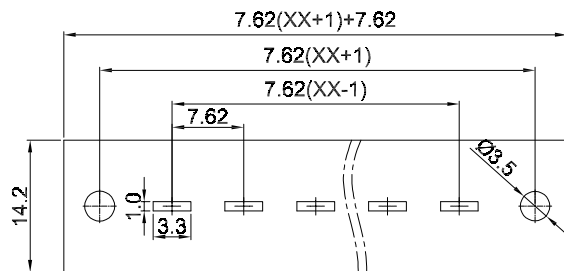

技术参数 (Technical Data)			
应用组别 (Use group)	B	C	D
UL 额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	300V/15A
IEC 过压类别 (Overvoltage Category) / 污染等级 (Pollution Degree)	III/3	III/2	III/2
额定电器参数 (Rated Electrical Parameters)	250V/24A	250V/24A	250V/24A
压线范围 (Wire Range)	/		
工频耐压 (Frequency Voltage)	AC 2500V		
冲击耐压 (Rated Surge Voltage)	4000V		
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above		
接触电阻 (Contact Resistance)	≤20mΩ		
剥线长度 (String Length)	10		
工作温度 (Temperature)	-40° C --- +105° C		
额定扭矩 (Rated torque)	/		
材质和电镀 (Material and plating)			
绝缘材质 (Housing)	PA66		
导体材料 (Contact)	铜合金, 镀锡 (Copper alloy, Sn plated)		
/	/		

产品命名编码:
(Product Number Code):

BT2.5-XX-762-28HM-YY

系列 (Series)	型号 (Model)
极数 (NO. of poles)	塑体颜色 (Housing Color)
端子间距 (Pitch)	1:绿色 (Green) 7:透明色 (Transparent)
	2:蓝色 (Blue) 8:白色 (White)
	3:黑色 (Black) 9:黄色 (Yellow)
	4:灰色 (Grey) Y:多种颜色 (Mixed color)
	5:橙色 (Orange)
	6:红色 (Red)

P=7.62mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 02p-19p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44
B	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	99.06	106.68	114.3	121.92	129.54	137.16	144.78	152.40	160.02
B	76.2	83.82	91.44	99.06	106.68	114.3	121.92	129.54	137.16

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围 (Tolerance Range)	
	150~	±1.50
型号 (Type): BT2.5-XX-762-28HM-YY	60~150	±1.00
	30~60	±0.60
核准 (Approval):	6~30	±0.40
	0~6	±0.25
核审 (Audit):	角度 (Angle)	X ±2°
	单位 (Units): mm	XX ±1°
设计 (Design)	页码 (Page): 1/1	版次 (Version): T0
	比例 (Scale): FULL	