
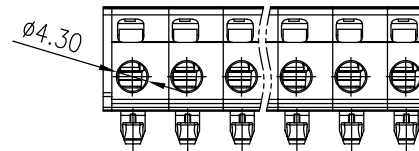




版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)



技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
IEC	额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	300V/15A
	过压类别 (Overvoltage Category) / 污染等级 (Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	300V/15A
压线范围(Wire Range)		/		
工频耐压(Frequency Voltage)		AC 2500V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗 (Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		10		
工作温度(Temperature)		-40° C--+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plated)		
/		/		

产品命名编码:
(Product Number Code):

FPC2.5-XX-750-22C-YY

系列 (Series)

极数 (NO. of poles)

端子间距 (Pitch)

型号 (Model)

塑体颜色 (Housing Color)

- | | |
|---------------|----------------------|
| 1:绿色 (Green) | 7:透明色 (Transparent) |
| 2:蓝色 (Blue) | 8:白色 (White) |
| 3:黑色 (Black) | 9:黄色 (Yellow) |
| 4:灰色 (Grey) | Y:多种颜色 (Mixed color) |
| 5:橙色 (Orange) | |
| 6:红色 (Red) | |

P=7.50mm,N为孔位数(N for hole digits),有效位数为 (Significant Digits):02p-19p

	02P	03P	04P	05P	06P	07P	08P	09P	10P
N	14.00	21.50	29.00	36.50	44.00	51.50	59.00	66.50	74.00
L	7.50	15.00	22.50	30.00	37.50	45.00	52.50	60.00	67.50
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	81.50	89.00	96.50	104.00	111.50	119.00	126.50	134.00	141.50
B	75.00	82.50	90.00	97.50	105.00	112.50	120.00	127.50	135.00

东莞市奥斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD,		公差范围 (Tolerance Range)	
型号 (Type): FPC2.5-XX-750-22C-YY		150~	±1.50
		60~150	±1.00
核准 (Approval): 图号 (Drawing NO.):		30~60	±0.60
		6~30	±0.40
核审 (Audit): 单位 (Units):mm 页码 (Page):1/1		0~6	±0.25
		角度 (Angle) X	±2°
设计 (Design) 比例 (Scale):FULL		XX	±1°
		版次 (Version):T0	