


| 版次 (Version) | 变更内容 (Rev. Content) | 变更者 (Change Person) |
|-----------------|------------------------|------------------------|
| | | |
| | | |

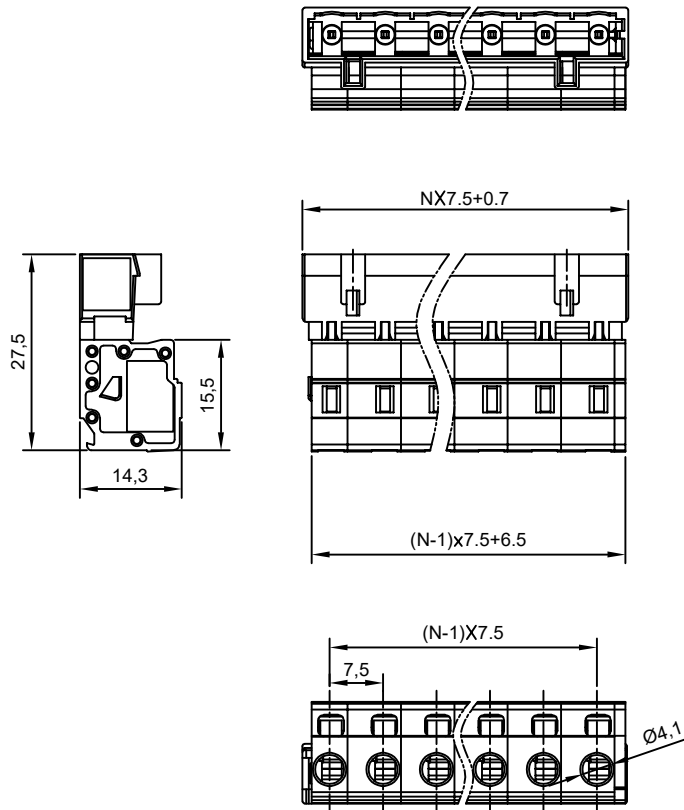

| 技术参数 (Technical Data) | | | | |
|-----------------------------|---|----------------------------------|----------|----------|
| UL | 应用组别(Use group) | B | C | D |
| | 额定电器参数 (Rated Electrical Parameters) | 300V/15A | 300V/15A | 300V/15A |
| IEC | 过压类别(Overvoltage Category) /污染等级(Pollution Degree) | III/3 | III/2 | III/2 |
| | 额定电器参数 (Rated Electrical Parameters) | 300V/15A | 300V/15A | 300V/15A |
| 压线范围(Wire Range) | | / | | |
| 工频耐压(Frequency Voltage) | | AC 2500V | | |
| 冲击耐压(Rated Surge Voltage) | | 4000V | | |
| 绝缘阻抗(Insulation Resistance) | | DC500V 500MΩ above | | |
| 接触电阻(Contact Resistance) | | ≤20mΩ | | |
| 剥线长度(String Length) | | / | | |
| 工作温度(Temperature) | | -40° C--+105° C | | |
| 额定扭矩(Rated torque) | | / | | |
| 材质和电镀(Material and plating) | | | | |
| 绝缘材质(Housing) | | PA66 | | |
| 导体材料(Contact) | | 铜合金, 镀锡(Copper alloy, Sn plated) | | |
| / | | / | | |

产品命名编码:
(Product Number Code):

FPM2.5-XX-750-24-YY


系列 (Series) ———— 型号 (Model)
极数 (NO. of poles) ———— 塑体颜色 (Housing Color)

端子间距 (Pitch) ————

| | |
|---------------|----------------------|
| 1:绿色 (Green) | 7:透明色 (Transparent) |
| 2:蓝色 (Blue) | 8:白色 (White) |
| 3:黑色 (Black) | 9:黄色 (Yellow) |
| 4:灰色 (Grey) | Y:多种颜色 (Mixed color) |
| 5:橙色 (Orange) | |
| 6:红色 (Red) | |

P=7.50mm,N为孔位数(N for hole digits),有效位数为 (Significant Digits):02p-19p

| N | 02P | 03P | 04P | 05P | 06P | 07P | 08P | 09P | 10P |
|---|-------|-------|-------|--------|--------|--------|--------|--------|--------|
| L | 15.70 | 23.20 | 30.70 | 38.20 | 45.70 | 53.20 | 60.70 | 68.20 | 75.70 |
| B | 7.50 | 15.00 | 22.50 | 30.00 | 37.50 | 45.00 | 52.50 | 60.00 | 67.50 |
| N | 11P | 12P | 13P | 14P | 15P | 16P | 17P | 18P | 19P |
| L | 83.20 | 90.70 | 98.20 | 105.70 | 113.20 | 120.70 | 128.20 | 135.70 | 143.20 |
| B | 75.00 | 82.50 | 90.00 | 97.50 | 105.00 | 112.50 | 120.00 | 127.50 | 135.00 |

| | | |
|--|-----------------------|------------------|
|  东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD. | 公差范围(Tolerance Range) | |
| | 150~ | ±1.50 |
| 型号 (Type): FPM2.5-XX-750-24-YY | 60~150 | ±1.00 |
| | 30~60 | ±0.60 |
| 核准 (Approval): | 6~30 | ±0.40 |
| | 0~6 | ±0.25 |
| 核审 (Audit): | 角度 (Angle) X | ±2° |
| | 单位 (Units): mm | 页码 (Page): 1/1 |
| 设计 (Design) | 比例 (Scale): FULL | 版次 (Version): T0 |
| | | |