
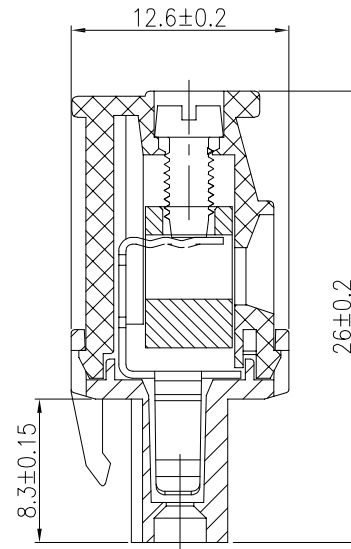


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

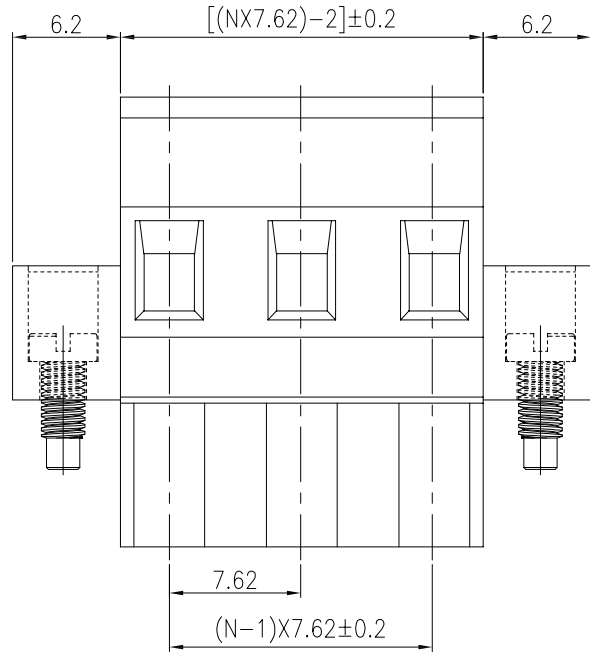

技术参数 (Technical Data)				
应用组别(Use group)	B	C	D	
UL 应用组别(Use group) (Rated Electrical Parameters)	300V/15A	300V/15A	300V/15A	
IEC 过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	III/2	
IEC 额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	300V/15A	
压线范围(Wire Range)	/			
工频耐压(Frequency Voltage)	AC 2500V			
冲击耐压(Rated Surge Voltage)	4000V			
绝缘阻抗(Insulation Resistance)	DC500V 500MΩ above			
接触电阻(Contact Resistance)	≤20mΩ			
剥线长度(String Length)	10			
工作温度(Temperature)	-40° C--+105° C			
额定扭矩(Rated torque)	/			
材质和电镀(Material and plating)				
绝缘材质(Housing)	PA66			
导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plated)			
/	/			

产品命名编码:  
(Product Number Code):


FPC2.5-XX-762-05M-YY

系列(Series) \_\_\_\_\_  
极数(NO. of poles) \_\_\_\_\_  
端子间距(Pitch) \_\_\_\_\_  
型号(Model) \_\_\_\_\_  
塑体颜色(Housing Color) \_\_\_\_\_

- |              |               |
|--------------|---------------|
| 1:绿色(Green)  | 7:透明色         |
| 2:蓝色(Blue)   | 8:白色(White)   |
| 3:黑色(Black)  | 9:黄色(Yellow)  |
| 4:灰色(Grey)   | Y:多种颜色        |
| 5:橙色(Orange) | 6:红色(Red)     |
|              | (Mixed color) |

P=7.62mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	25.64	33.26	40.88	48.50	56.12	63.74	71.36	78.98	86.60
B	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	94.22	101.84	109.46	117.08	124.70	132.32	139.94	147.56	155.18
B	76.20	83.82	91.44	99.06	106.68	114.30	121.92	129.54	137.16

 <b>东莞市澳斯电子有限公司</b> <b>DONGGUAN AOSI ELECTRONICS CO., LTD,</b>	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): FPC2.5-XX-762-05M-YY	60~150	±1.00
	30~60	±0.60
核准(Approval):	6~30	±0.40
	0~6	±0.25
核审(Audit):	图号(Drawing NO.):	角度 X ±2°
	单位(Units):mm	页码(Page):1/1
设计(Design)	比例(Scale):FULL	角度 X.X ±1°
		版次(Version):T0