

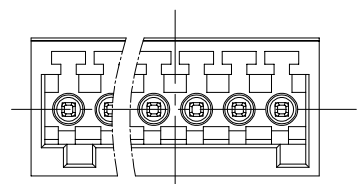


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

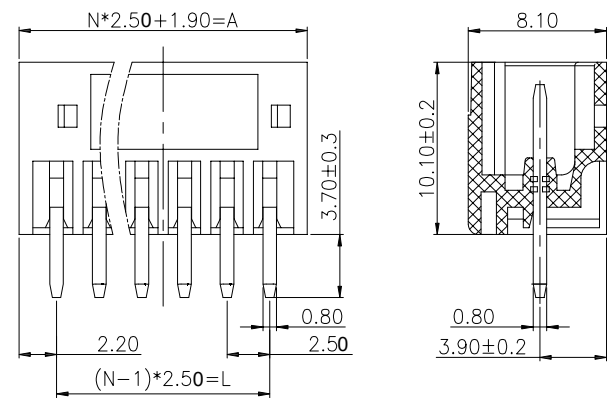

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	150V/5A	150V/5A	150V/5A
IEC	过压类别 (Overvoltage Category) / 污染等级 (Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	150V/5A	150V/5A	150V/5A
压线范围(Wire Range)		/		
工频耐压(Frequency Voltage)		AC 1300V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗 (Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		/		
工作温度(Temperature)		-40° C--+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plsted)		
/		/		

产品命名编码:  
(Product Number Code):

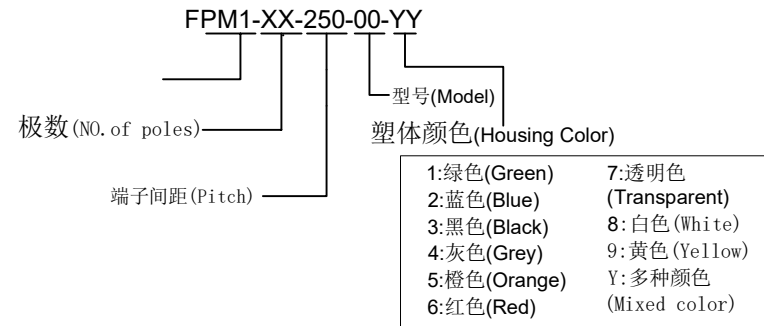

P=2.50mm,N为孔位数(N for hole digits),有效位数为 (Significant Digits):02p-19p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	6.90	9.40	11.90	14.40	16.90	19.40	21.90	24.40	26.90
B	2.50	5.00	7.50	10.00	12.50	15.00	17.50	20.00	22.50
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	29.40	31.90	34.40	36.90	39.40	41.90	44.40	46.90	49.40
B	25.00	27.50	30.00	32.50	35.00	37.50	40.00	42.50	45.00

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD,	公差范围(Tolerance Range)		
	150~	±1.50	
型号(Type): FPM1-XX-250-00-YY	60~150	±1.00	
	30~60	±0.60	
核准(Approval):	图号(Drawing NO.):	6~30	±0.40
		0~6	±0.25
核审(Audit):	单位(Units):mm	角度 (Angle)	X ±2°
	页码(Page):1/1	X.X	±1°
设计(Design)	比例(Scale):FULL		版次 (Version):T0