



| 版次 (Version) | 变更内容 (Rev. Content) | 变更者 (Change Person) |
|-----------------|------------------------|------------------------|
| | | |
| | | |

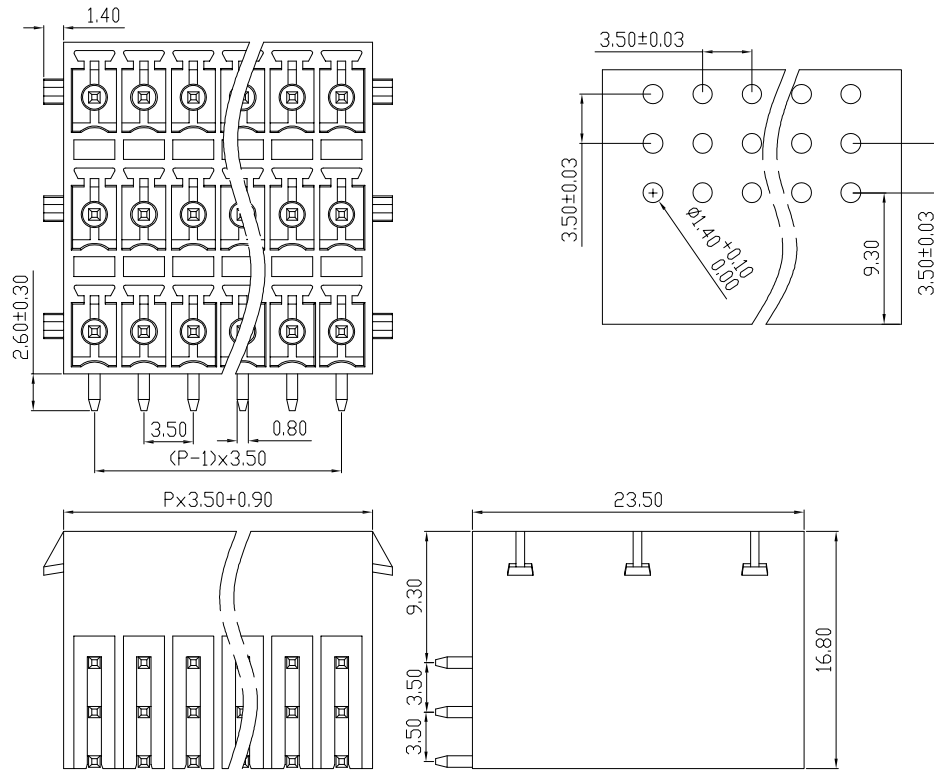

| 技术参数 (Technical Data) | | | | |
|-----------------------------|---|----------------------------------|---------|---------|
| UL | 应用组别(Use group) | B | C | D |
| | 额定电器参数 (Rated Electrical Parameters) | 300V/8A | 300V/8A | 300V/8A |
| IEC | 过压类别(Overvoltage Category) /污染等级(Pollution Degree) | III/3 | III/2 | III/2 |
| | 额定电器参数 (Rated Electrical Parameters) | 300V/8A | 300V/8A | 300V/8A |
| 压线范围(Wire Range) | | / | | |
| 工频耐压(Frequency Voltage) | | AC 2500V | | |
| 冲击耐压(Rated Surge Voltage) | | 4000V | | |
| 绝缘阻抗(Insulation Resistance) | | DC500V 500MΩ above | | |
| 接触电阻(Contact Resistance) | | ≤8mΩ | | |
| 剥线长度(String Length) | | / | | |
| 工作温度(Temperature) | | -40° C--+105° C | | |
| 额定扭矩(Rated torque) | | / | | |
| 材质和电镀(Material and plating) | | | | |
| 绝缘材质(Housing) | | PA66 | | |
| 导体材料(Contact) | | 铜合金, 镀锡(Copper alloy, Sn plated) | | |
| / | | / | | |

产品命名编码:
(Product Number Code):

FPH1.5-XX-350-33R-YY

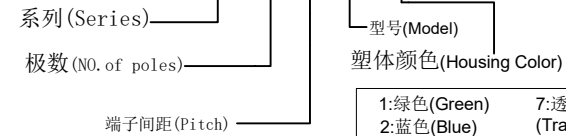

| | |
|--------------|-------------------------|
| 1:绿色(Green) | 7:透明色 (Transparent) |
| 2:蓝色(Blue) | 8:白色(White) |
| 3:黑色(Black) | 9:黄色(Yellow) |
| 4:灰色(Grey) | Y:多种颜色 (Mixed color) |
| 5:橙色(Orange) | |
| 6:红色(Red) | |

P=3.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

| | N | 3*2P | 3*3P | 3*4P | 3*5P | 3*6P | 3*7P | 3*8P | 3*9P | 3*10P |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L | 10.30 | 13.80 | 17.30 | 20.80 | 24.30 | 27.80 | 31.30 | 34.80 | 38.30 | |
| B | 3.50 | 7.00 | 10.50 | 14.00 | 17.50 | 21.00 | 24.50 | 28.00 | 31.50 | |
| N | 3*11P | 3*12P | 3*13P | 3*14P | 3*15P | 3*16P | 3*17P | 3*18P | 3*19P | |
| L | 41.80 | 45.30 | 48.80 | 52.30 | 55.80 | 59.30 | 62.80 | 66.30 | 69.80 | |
| B | 35.00 | 38.50 | 42.00 | 45.50 | 49.00 | 52.50 | 56.00 | 59.50 | 63.00 | |

| | | |
|--|-----------------------|----------------|
| 东莞市奥斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD. | 公差范围(Tolerance Range) | |
| | 150~ | ±1.50 |
| 型号(Type): FPH1.5-XX-350-33R-YY | 60~150 | ±1.00 |
| | 30~60 | ±0.60 |
| 核准(Approval): | 6~30 | ±0.40 |
| | 0~6 | ±0.25 |
| 核审(Audit): | 角度 X | ±2° |
| | 单位(Units):mm | 页码(Page):1/1 |
| 设计(Design) | 比例(Scale):FULL | 版次(Version):T0 |
| | | |