


| 版次 (Version) | 变更内容 (Rev. Content) | 变更者 (Change Person) |
|-----------------|------------------------|------------------------|
| | | |
| | | |

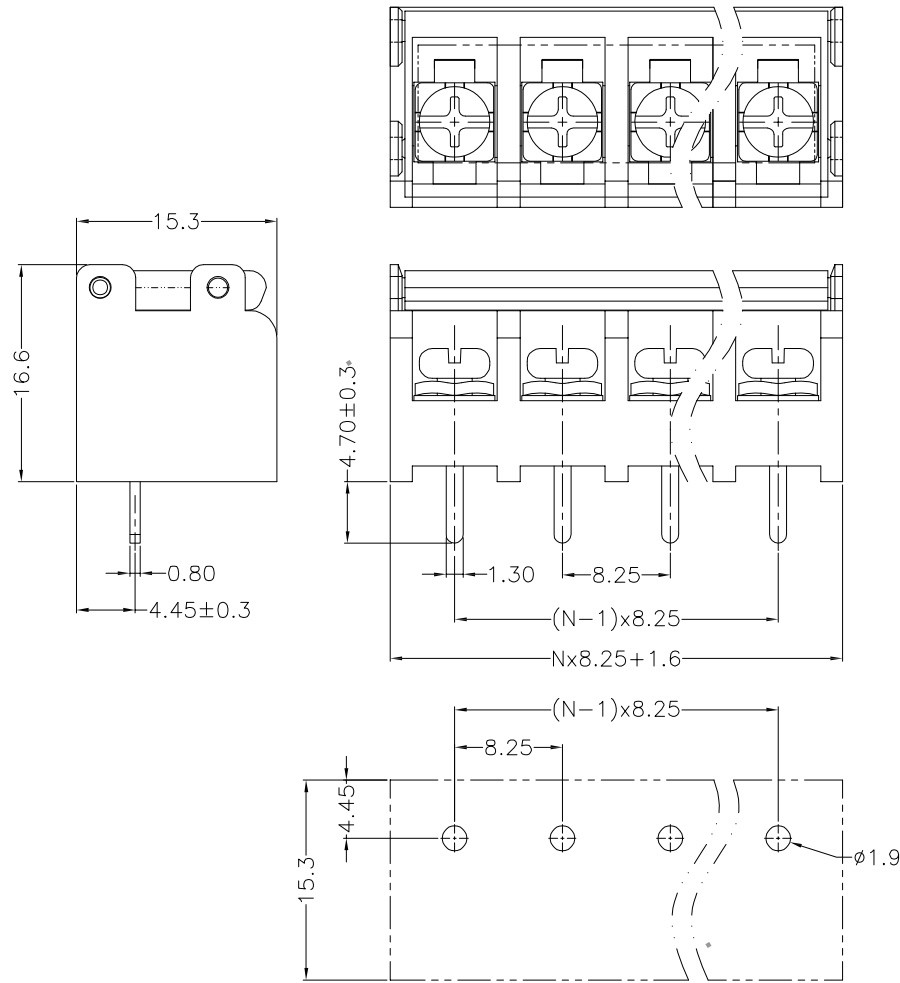

P.C.B.LAYOUT

P=8.25mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

| N | 02P | 03P | 04P | 05P | 06P | 07P | 08P | 09P | 10P |
|---|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| L | 18.10 | 26.35 | 34.60 | 42.85 | 51.10 | 59.35 | 67.60 | 75.85 | 84.10 |
| B | 8.25 | 16.50 | 24.75 | 33.00 | 41.25 | 49.50 | 57.75 | 66.00 | 74.25 |
| N | 11P | 12P | 13P | 14P | 15P | 16P | 17P | 18P | 19P |
| L | 92.35 | 100.60 | 108.85 | 117.10 | 125.35 | 133.60 | 141.85 | 150.10 | 158.35 |
| B | 82.50 | 90.75 | 99.00 | 107.25 | 115.50 | 123.75 | 132.00 | 140.25 | 148.50 |

技术参数 (Technical Data)

| 应用组别(Use group) | B | C | D |
|--|----------------------------------|----------|----------|
| UL 额定电器参数 (Rated Electrical Parameters) | 300V/20A | 300V/20A | 300V/20A |
| IEC 过压类别(Overvoltage Category) /污染等级(Pollution Degree) | III/3 | III/2 | III/2 |
| 额定电器参数 (Rated Electrical Parameters) | 250V/24A | 250V/24A | 250V/24A |
| 压线范围(Wire Range) | / | | |
| 工频耐压(Frequency Voltage) | AC 2500V | | |
| 冲击耐压(Rated Surge Voltage) | 4000V | | |
| 绝缘阻抗(Insulation Resistance) | DC500V 500MΩ above | | |
| 接触电阻(Contact Resistance) | ≤20mΩ | | |
| 剥线长度(String Length) | 10 | | |
| 工作温度(Temperature) | -40° C--+105° C | | |
| 额定扭矩(Rated torque) | / | | |
| 材质和电镀(Material and plating) | | | |
| 绝缘材质(Housing) | PA66 | | |
| 导体材料(Contact) | 铜合金, 镀锡(Copper alloy, Sn plsted) | | |
| / | / | | |


产品命名编码:
(Product Number Code):

HB-XX-825-00M-YY

系列(Series) 型号(Model)
极数(NO. of poles) 塑体颜色(Housing Color)

端子间距(Pitch)

- | | |
|--------------|-------------------------|
| 1:绿色(Green) | 7:透明色 (Transparent) |
| 2:蓝色(Blue) | 8:白色(White) |
| 3:黑色(Black) | 9:黄色(Yellow) |
| 4:灰色(Grey) | Y:多种颜色 (Mixed color) |
| 5:橙色(Orange) | |
| 6:红色(Red) | |

| | | |
|--|-----------------------|-------------------------------------|
|  东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD, | 公差范围(Tolerance Range) | |
| | 150~ | ±1.50 |
| 型号(Type):HB-XX-825-00M-YY | 60~150 | ±1.00 |
| | 30~60 | ±0.60 |
| 核准(Approval): | 6~30 | ±0.40 |
| | 0~6 | ±0.25 |
| 核审(Audit): | 图号(Drawing NO.): | 角度 X ±2° (Angle) X.X ±1° |
| | 单位(Units):mm | 页码(Page):1/1 |
| 设计(Design) | 比例(Scale):FULL | 版次(Version):T0 |